


Embutido de Teto

ANDROMEDA M

No FRAME - Fixa

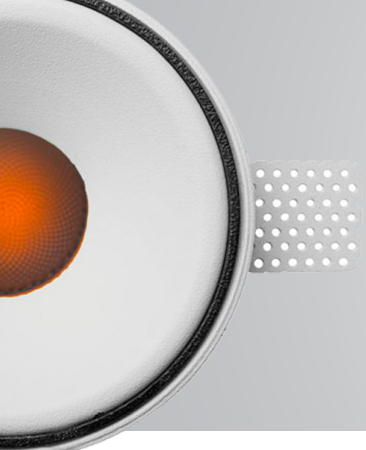

ÂNGULO
15°

ÂNGULO
36°


ÂNGULO
50°



DRIVER DIMERIZÁVEL

DALI | TRIAC | 0 - 10

Sob consulta

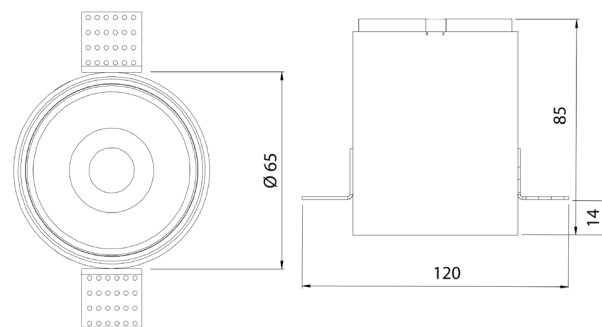

NICHO Ø 66 mm

Imagens meramente ilustrativas

Dimensões em milímetros:

CÓDIGO	POTÊNCIA	FLUXO LUMINOSO	TEMPERATURA DE COR
ET02PL27PO017	8,5W	1159 lm	2700 K
ET02PL30PO013	8,5W	1211 lm	3000 K
ET02PL40PO012	8,5W	1248 lm	4000 K
ET02PL27PO016	12,3W	1614 lm	2700 K
ET02PL30PO014	12,3W	1686 lm	3000 K
ET02PL40PO013	12,3W	1739 lm	4000 K
ET02PL27PO020	13,6W	1901 lm	2700 K
ET02PL30PO015	13,6W	1988 lm	3000 K
ET02PL40PO014	13,6W	2049 lm	4000 K
ET02PL27PO019	17,4W	2332 lm	2700 K
ET02PL30PO016	17,4W	2437 lm	3000 K
ET02PL40PO015	17,4W	2512 lm	4000 K
ET02PL27PO051	21,2W	2332 lm	2700 K
ET02PL30PO052	21,2W	2870 lm	3000 K
ET02PL40PO051	21,2W	2958 lm	4000 K

IRC >80

CÓDIGO	POTÊNCIA	FLUXO LUMINOSO	TEMPERATURA DE COR
ET02PL27PO012	8,5W	957 lm	2700 K
ET02PL30PO018	8,5W	1000 lm	3000 K
ET02PL40PO017	8,5W	1058 lm	4000 K
ET02PL27PO011	12,3W	1299 lm	2700 K
ET02PL30PO019	12,3W	1357 lm	3000 K
ET02PL40PO018	12,3W	1398 lm	4000 K
ET02PL27PO015	13,6W	1571 lm	2700 K
ET02PL30PO020	13,6W	1642 lm	3000 K
ET02PL40PO019	13,6W	1691 lm	4000 K
ET02PL27PO014	17,4W	1926 lm	2700 K
ET02PL30PO021	17,4W	2013 lm	3000 K
ET02PL40PO020	17,4W	2074 lm	4000 K
ET02PL27PO052	21,2W	2269 lm	2700 K
ET02PL30PO053	21,2W	2370 lm	3000 K
ET02PL40PO052	21,2W	2443 lm	4000 K

IRC >90