

# Embutido de teto

## UMILLE P



### CATEGORIA:

Embutido de teto

### MATERIAL:


Alumínio extrudado, aço com difusor em poliestileno

### ACABAMENTO:



Pintura eletrostática a pó.

### CORES:

Consulte catálogo de cores e disponibilidade.

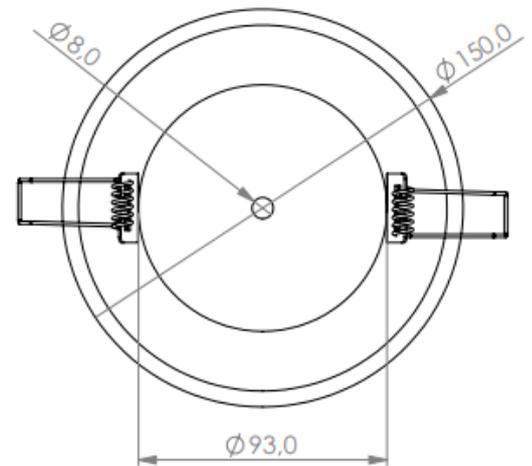

Dimensões em milímetros:

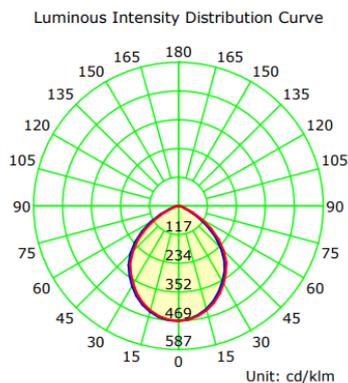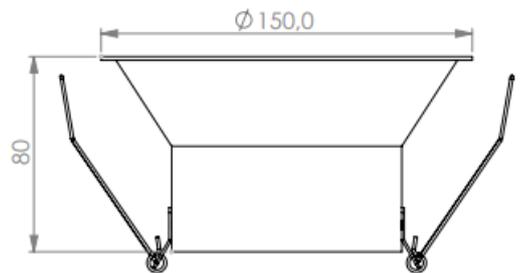

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	256.03	2.20/2.20	3.8	95.97
2.0	64.01	4.40/4.40	15.2	23.99
3.0	28.45	6.60/6.60	34.3	10.66
4.0	16.00	8.79/8.81	61.0	6.00
5.0	10.24	10.99/11.01	95.3	3.84

Dh Beam Angle(B): H95.4 V95.5 Field Angle(F): H135.0 V135.5

CÓDIGO	FONTE DE LUZ	POTÊNCIA	FLUXO LUMINOSOS	EFICIÊNCIA	IRC	ÂNGULO	TEMPERATURA DE COR	TENSÃO	MEDIDAS
EB-UMILLE-P	LED	10W	544,8 lm	66,7 lm/W	>90	90°	2700/3000/4000K	Autovolt	Ø 150 x A 80